

DALI Dry Contact


Model No: L30-6D

Profile

- The DALI dry contact is small enough to fit in an 86-bottoming case;
- With 6 contacts and 2 common contacts

Features


- Standard DALI signal input
- Low voltage power supply DC12V
- Each contact function can be configured by software
- Manually set the address
- Small size, easy to install

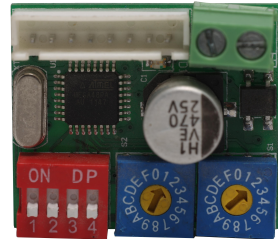

Technical Parameters

Model No	L30-6D
Brand	LAMMIN
Input Signal	DALI signal
Input Voltage	DC 12V
Contacts	6
Certification	CE
Working Temp	-20°C ~ +50°C
Warranty	3 years
Size(L*W*H)MM	30*40*15

Wiring Diagram and Installations

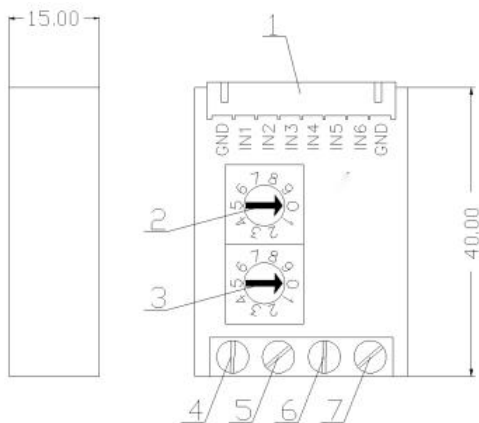

- 1) Contacts and common points
- 2) Address knob switch (one bit)
- 3) Address knob switch (tens)
- 4) 12V power supply (+)
- 5) 12V power supply (-)
- 6) DALI Signal (DA+)
- 7) DALI Signal (DB-)

- After the power is connected, the indicator light will light up, indicates that the it is working normally.
- When addressing the device, or selecting the device, the LED light will blink.
- The device follows the DALI protocol, with the functions of bus addressing, address setting, on, off, and so on.

