

KNX Switch Actuator(Curtain Controller)

Model No: LR04AKC

Profile

- The 4-way curtain controller controls the motor through the input of KNX signal;
- The output current of a single loop can reach 6A.
- Motor positive and negative rotation time can be set

Features


- Applicable for standard KNX signal and other inductive loads
- High-power magnetic latching relays, no power consumption
- Power consumption, anti-surge current>170A
- Long life cycle, small size and DIN-rail installation,easy to install
- Relay manual operation is optional



Technical Parameters

Model No	LR04AKC
Brand	LAMMIN
Input Signal	KNX signal
Input Voltage Range	EIB/KNX DC21-30V
Frequency Range	50/60Hz
Max Load Current	6A/CH*4
Current Range	15mA
Load Type	Dry contact motor/low voltage motor/high voltage motor
Certification	CE
Working Temp	-20°C~+50°C
Warranty	3 years
Size(L*W*H)MM	72*88*65
Installation	35MM Din-rail
Customization	YES

Wiring Diagram and Installations

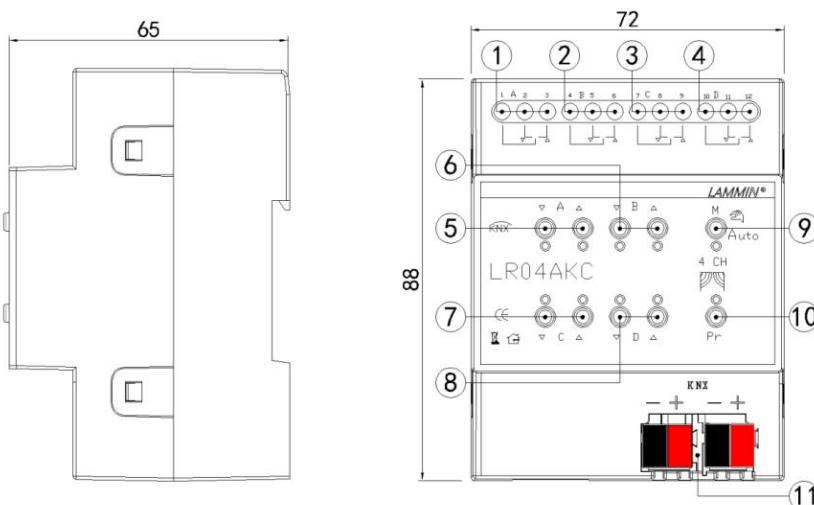

- 1)-4) Input/output ports 1-4
- 5)-8) 1-4 manual dip switches
- 9) Manual/automatic switch button
- 10) Programming button
- 11) EIB BUS terminals