

# DALI Switch Actuator

Model No: LR06CD

## Profile

- High-power switch actuator can achieve high power switching control through DALI signal input
- 6 channels with single loop max output power reach to 20A
- High-power magnetic latching relays

## Features


- Applicable for standard DALI signal and other inductive loads
- High-power magnetic latching relays, no power consumption
- Power consumption, anti-surge current > 170A
- Long life cycle, small size and DIN-rail installation, easy to install
- Relay manual operation is optional
- White or black metal shell



## Technical Parameters

Model No	LR06CD	LR04CD	LR08CD	LR12CD
Brand	LAMMIN			
Input Signal	DALI signal			
Input Voltage	AC 220V			
Frequency Range	50/60Hz			
Max Load Current	20A/CH*6	20A/CH*4	20A/CH*8	20A/CH*12
Max Output	20A 250VAC, 4000W, 3*10 <sup>4</sup> (fluorescent lamp) 5HP 250VAC 3*10 <sup>4</sup> (motor load)			
Min Load	60W			
Certification	CE			
Working Temp	-20°C ~ +50°C			
Warranty	3 years			
Size(L*W*H)MM	144*92*65	72*92*65	144*92*65	216*92*65
Installation	35MM Din-rail			
Customization	YES			

## Wiring Diagram and Installations

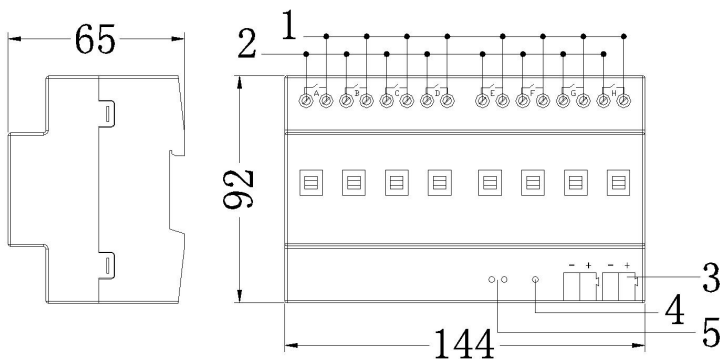

- 1) Output terminal
- 2) Input terminal
- 3) EIB terminal
- 4) Programming button
- 5) Working indicator