

KNX Convert to DC 1-10V Dimmer

Model No: L6293-08K

Profile

- KNX convert to 1-10V output , 8 channels 1-10V output with manual button
- DC24-30V DC power supply

Features


- 8*DC 1-10V/50mA
- AC voltage input, safe and reliable
- Short out protection, overload and over-voltage protection
- Long life cycle, small size and 35mm DIN-rail installation



Technical Parameters

Model No	L6293-08K
Brand	LAMMIN
Input Signal	KNX signal
Input Voltage	DC 30V
Frequency Range	50/60Hz
Dimming Output Power	8*DC 1-10V/50mA
Certification	CE
Working Temp	-20°C~+50°C
Warranty	3 years
Size(L*W*H)MM	72*88*65
Installation	35mm DIN rail

Wiring Diagram and Installations

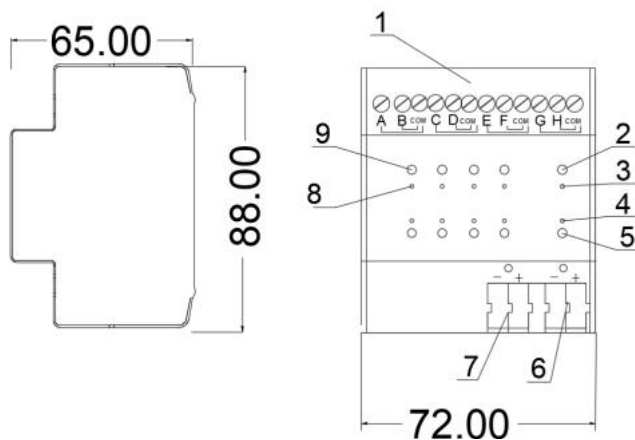

- 1) 8*50mA output 1-10V
- 2) Manual switch button
- 3) Manual switch indicator
- 4) Programming button indicator
- 5) Programming button
- 6) Input power supply 30V DC
- 7) EIB bus connection terminal
- 8) 8 channel manual indicator
- 9) 8 channel way manual button